



# Pressure Tank

## Pressure Tank

AquaFos water tanks are suited for all water systems: industrial, domestic and agricultural.

The tanks are constructed of a polypropylene liner combined with high grade butyl diaphragm to isolate water and air.


This provides a closed system for drinking water preventing the growth of bacteria and vermin intrusion.

The cast stainless steel water connection is used for corrosion resistance.

All tanks are quality tested to insure the structural integrity of every tank.

## Features

- NSF Standard 61, IAPMO R&T UPC approved
- Polypropylene liner ensures long durability
- Butyl diaphragm assure long life and safety
- Highly rust resistant durable baked epoxy coating finish
- Cast stainless steel water connection
- Leak free, o-ring sealed air valve cap
- 100% pressure tested
- No maintenance

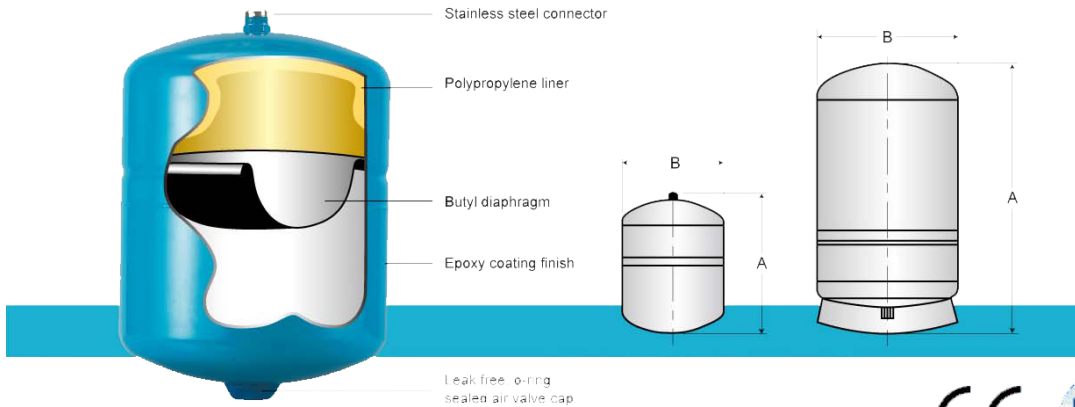

## Specification

Model		Volume		Dimensions				Connection	Shipping Volume (box)		Shipping Weight	
				A		B			cu. M	cu. ft	kg	lbs
BSP	NPT	liter	gal	mm	inch	mm	inch					
SPTB8	SPTN8	8	2	300	11.7	202	7.9	1"BSP/3/4" NPT	0.016	0.55	2.5	5.5
SPTB18	SPTN18	18	4.5	280	14.8	276	10.8	1"BSP/3/4" NPT	0.031	1.1	4.2	9.3
SPTB24	SPTN24	24	6	420	16.4	290	11.3	1"BSP/3/4" NPT	0.041	1.45	4.7	10.4
<b>Vertical Models with base</b>												
SPTB58	SPTN58	58	14.5	560	21.8	390	15.2	1"BSP/3/4" NPT	0.099	3.5	11.5	25.3
SPTB80	SPTN80	80	20	680	26.5	390	15.2	1"BSP/3/4" NPT	0.128	4.52	13	28.7

All connections are stainless steel unless stated otherwise. Tank precharge: 15psi / 1 bar

Maximum Working Pressure: 150 psi/10 bar

Maximum Working Temperature: 200°F/90°C

Swiss Pump Company AG • Moosweg 36 • CH - 3645 Thun - Gwatt • Switzerland

Tel. +41 33 223 11 00 • Fax +41 33 223 11 22 • mail@swisspump.com • www.swisspump.com