


SPT Series • Pool pumps

Application

- Suitable for spa and pools.
- 2 speed motor available for energy-saving.
- Self-priming 2m.
- 115V/60Hz, 230V/60Hz, 115-230V/60Hz.
- With cable 5ft.



Performance curve

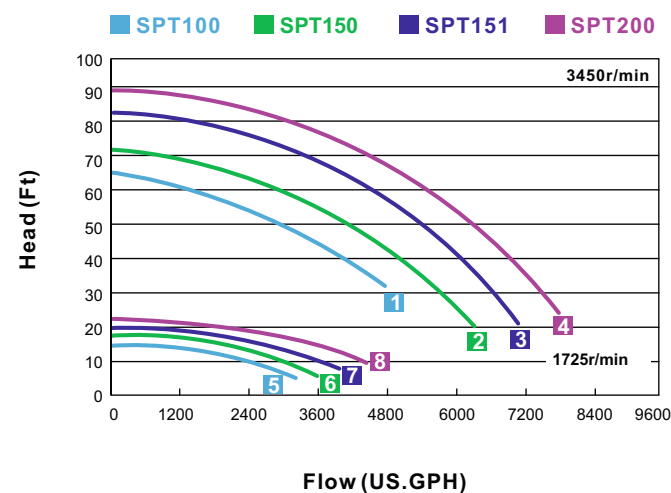

Performance table

MODEL	VOLTAGE/ FREQUENCY (V/Hz)	HP	CURVES	MAXIMUM	
				GALLONS PER HOUR	HEAD IN FEET
SPT100	115&230/60	1	1	4800	66
SPT150	115&230/60	1½	2	6300	72
SPT151	115&230/60	1½	3	7200	82
SPT200	230/60	2	4	7900	89
SPT100-II	115/60	0.12 (Low Speed)	5	3200	15
		1 (High Speed)	1	4800	66
SPT150-II	115/60	0.18 (Low Speed)	6	3600	18
		1.5 (High Speed)	2	6300	72
SPT101-II	115/60	0.12 (Low Speed)	6	3600	18
	230/60	1 (High Speed)	2	6300	72
SPT151-II	230/60	0.18 (Low Speed)	7	4000	20
		1.5 (High Speed)	3	7200	82
SPT200-II	230/60	0.25 (Low Speed)	8	4500	22
		2 (High Speed)	4	7900	89


SPTP-D Series • Pool pumps

Application

- Suitable for spa pools, swimming pools, massage stations.
- 2 speed motor available for energy-saving.
- Self-priming 2m.
- 230V/60Hz, 3450RPM.
- With cable 5ft.



Performance curve

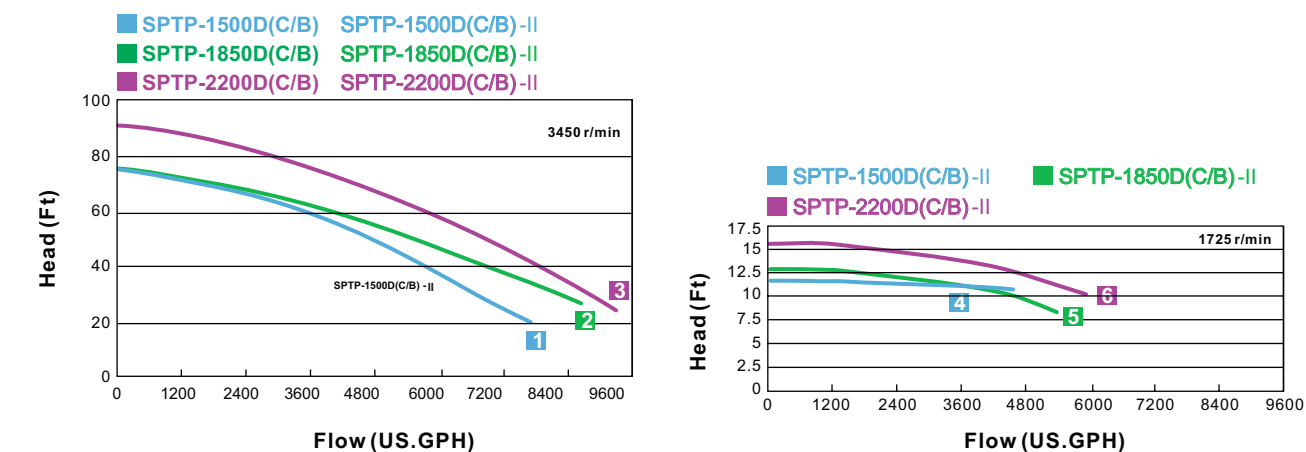

Performance table

MODEL	HP	INLET/ OUTLET	MAXIMUM	
			GALLONS PER HOUR	HEAD IN FEET
SPTP-1500D(C/B)	2	2"x2"	7600	76
SPTP-1850D(C/B)	3	2"x2"	8550	76
SPTP-2200D(C/B)	4	2"x2"	9000	90
SPTP-1500D-II	1/2	2"x2"	4650	11
	2		7600	76
SPTP-1850D-II	3/5	2"x2"	5300	13
	3		8550	76
SPTP-2200D-II	7/10	2"x2"	6000	16
	4		9000	90

- The model name with "C" means the joining between the pump part and the motor is a clamp.
- The model name with "B" means the joining between the pump part and the motor is Bolt & nuts.
- The model name with "II" means the motor are two speeds (3450rpm/1725rpm).
- The model name without "II" means the motor is single speed.


SPU Series • Pool pumps

Application

- Suitable for hydromassage bathtub or spa system.
- Single phase, 110-120V/60Hz, 3450RPM.
- Ø110 stator (Optional: Ø90, Ø124).
- With cable 5ft.



Performance curve

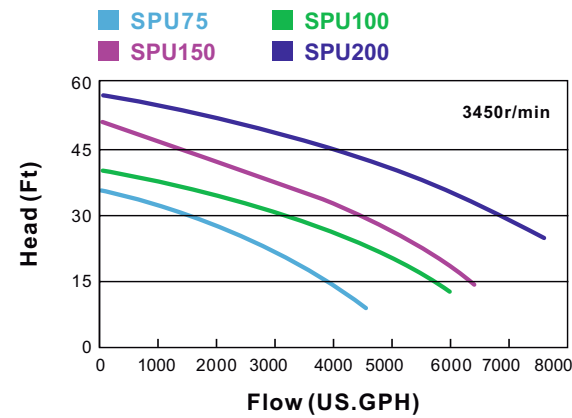

Performance table

MODEL	HP	INLET/ OUTLET	MAXIMUM	
			GALLONS PER HOUR	HEAD IN FEET
SPU75	3/4	1 1/2"x1 1/2"	4600	35
SPU100	1	1 1/2"x1 1/2"	6000	40
SPU150	1 1/2	1 1/2"x1 1/2"	6500	50
SPU200	2	1 1/2"x1 1/2"	7750	56


SPC Series • Pool pumps

Application

- Suitable for spa system(outdoor) and swimming pool.
- Design for high performance and super flow.
- 2 speed motor available for energy-saving.
- Single phase, 220V/60Hz, 3450RPM.
- With cable 5ft.



Performance curve

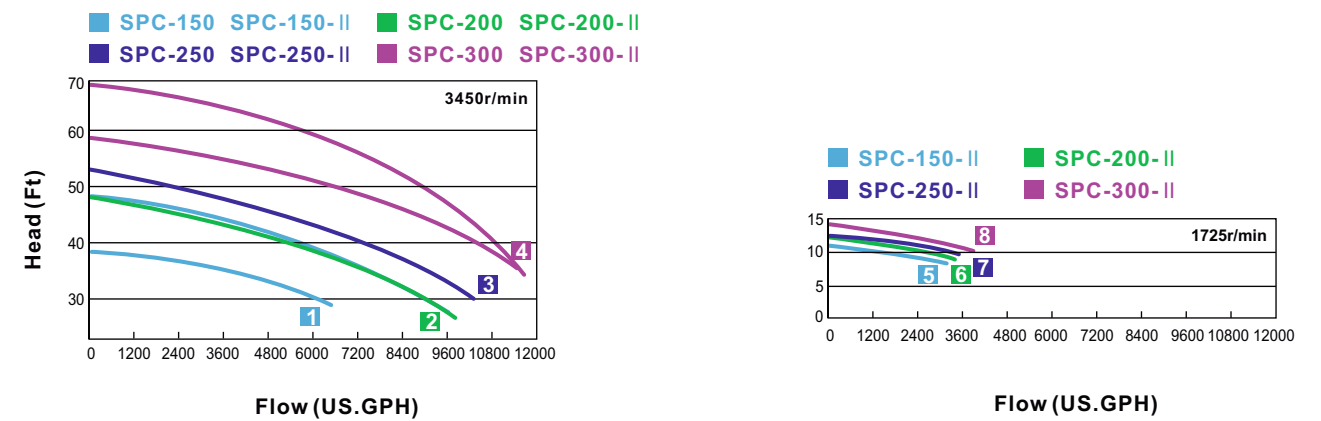

Performance table

MODEL	HP	INLET/ OUTLET	MAXIMUM	
			GALLONS PER HOUR	HEAD IN FEET
SPC-150	1 1/2	2"x2"	6800	39
SPC-200	2	2"x2"	9800	46
SPC-250	2 1/2	2"x2"	10600	52
SPC-300	3	2"x2"	11600	59
SPC-150 -II	5/8(Low Speed)	2"x2"	6800	39
	1 1/2(High Speed)		3300	11
SPC-200 -II	5/8(Low Speed)	2"x2"	9800	46
	2(High Speed)		3500	12
SPC-250 -II	5/8(Low Speed)	2"x2"	10600	52
	2 1/2(High Speed)		3600	12
SPC-300 -II	1(Low Speed)	2"x2"	11600	59
	3(High Speed)		4000	14